


Anéis elásticos para furos	Grupo: 526	Tipo: ARI	Norma:	Dimensões: mm
-----------------------------------	-------------------	------------------	---------------	----------------------

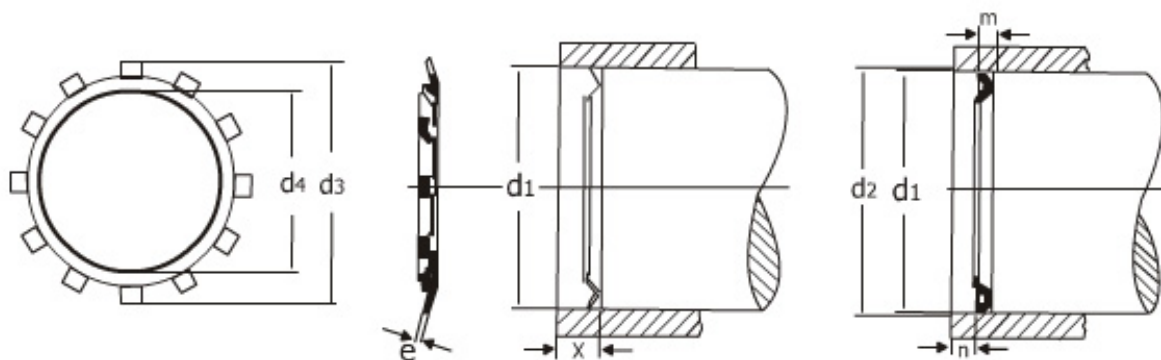

Pode ser montado em FURO LISO ou FURO COM RANHURA.

d_3 é o diâmetro do anel não tensionado.

		ANEL				DADOS COMPL.			RANHURA			
Código para encomenda	d_1	e	d_3	d_4	nº Dentes	Peso Kg/1000	X	C. Axial (Kgf)	d_2	Tol.	m min.	m min.
526.008	8,0	0,25	8,20	4,0	5	0,048	2,0	30	8,10	+0,060	0,4	1,0
526.010	10,0	0,25	10,20	5,0	6	0,068	2,0	35	10,10	+0,075	0,4	1,0
526.011	10,5	0,25	10,70	6,0	6	0,095	2,5	40	10,60	+0,075	0,4	1,0
526.012	12,0	0,25	12,25	6,0	6	0,112	2,5	45	12,10	+0,075	0,4	1,0
526.014	14,0	0,30	14,25	8,0	6	0,172	2,5	50	14,10	+0,075	0,5	1,0
526.015	15,0	0,30	15,25	9,0	6	0,192	2,5	55	15,10	+0,075	0,5	1,0
526.016	16,0	0,30	16,30	10,0	6	0,206	2,5	60	16,15	+0,075	0,5	1,5
526.017	17,0	0,30	17,30	11,0	8	0,236	3,0	65	17,15	+0,075	0,5	1,5
526.018	18,0	0,40	18,30	10,5	8	0,380	3,0	70	18,15	+0,110	0,8	1,5
526.019	19,8	0,50	20,20	11,0	8	0,604	3,5	80	20,00	+0,110	0,8	1,5
526.020	20,0	0,40	20,35	11,0	8	0,512	3,5	80	20,20	+0,110	0,8	1,5
526.021	22,0	0,50	22,35	13,0	8	0,680	3,5	80	22,20	+0,110	1,0	2,0
526.025	25,0	0,50	25,35	16,0	10	0,810	3,5	80	25,20	+0,110	1,0	2,0
526.026	26,0	0,50	26,40	17,0	10	0,856	3,5	85	26,20	+0,130	1,0	2,0
526.028	28,0	0,50	28,40	19,0	10	0,922	3,5	85	28,20	+0,130	1,0	2,0
526.030	30,0	0,50	30,40	21,0	10	1,010	4,0	90	30,20	+0,130	1,0	2,0
526.032	32,0	0,50	32,40	22,5	10	1,210	4,0	90	32,20	+0,130	1,0	2,0
526.035	35,0	0,50	35,40	25,0	10	1,320	4,0	90	35,20	+0,130	1,0	2,0
526.040	40,0	0,50	40,40	30,0	12	1,720	4,0	95	40,20	+0,130	1,0	2,0
526.045	45,0	0,50	45,40	35,0	12	1,830	4,0	95	45,20	+0,130	1,0	2,0
526.050	50,0	0,50	50,50	39,0	12	2,160	4,0	100	50,20	+0,130	1,0	2,0

Utilizar códigos em VERMELHO preferencialmente.

Reservamo-nos ao direito de modificação das dimensões acima sem consulta prévia.

GRUPO REI-FIX TEL: 11 2602-2626